



eleven FIFTY



eleven

FIFTY



de Verleihen Sie Ihren Räumen eine besondere Tiefe und Eleganz mit unserem hochwertigen Teppichboden in beeindruckender Hoch-Tief-Optik. Dieser innovative Bodenbelag schafft eine faszinierende dreidimensionale Struktur, die jedem Raum Charakter und Wärme verleiht.

Unser Kollektionsname „eleven FIFTY“ leitet sich von der Qualität APST 1150-28 ab.

Wir bieten zehn unterschiedliche Designs in bis zu sechs Farbstellungen an, welche sowohl als Bahnenware, als auch als abgepasste Teppiche erhältlich sind.

en Give your rooms a touch of special depth and elegance with our high-quality carpet in an impressive high-low pile effect. This innovative flooring creates a captivating three-dimensional structure that adds character and warmth to any space.

Our collection name, “eleven FIFTY,” is derived from the quality APST 1150-28. We offer ten different designs in up to six colour options, available both as broadloom and as rugs.

fr Donnez à vos pièces une profondeur et une élégance particulières avec notre moquette haut de gamme à l’aspect haut/bas impressionnant. Ce revêtement de sol innovant crée une structure tridimensionnelle fascinante qui confère à chaque pièce caractère et chaleur.

Le nom de notre collection «eleven FIFTY» est dérivé de la qualité APST 1150-28. Nous proposons dix designs différents dans jusqu’à six coloris, disponibles en lés ou en tapis ajustés.

Abgepasste Teppiche sind in folgenden Größen verfügbar:

A = 190 × 285 cm
B = 160 × 240 cm
C = 120 × 180 cm

Rugs are available in following sizes:

A = 190 × 285 cm
B = 160 × 240 cm
C = 120 × 180 cm

Les tapis sont disponibles dans les tailles suivantes :

A = 190 × 285 cm
B = 160 × 240 cm
C = 120 × 180 cm





13759rug - A02

120 × 180 cm





13759-A01

Det. appr. ca. 30 × 30 cm



13759-A04 Det. appr. ca. 30 × 30 cm



13759-A07 Det. appr. ca. 30 × 30 cm



13759-A06 Det. appr. ca. 30 × 30 cm



13759-A02 Det. appr. ca. 30 × 30 cm




13759-A05 Det. appr. ca. 30 × 30 cm



13758-A06 Det. appr. ca. 30 × 30 cm



13758-A05 Det. appr. ca. 30 × 30 cm

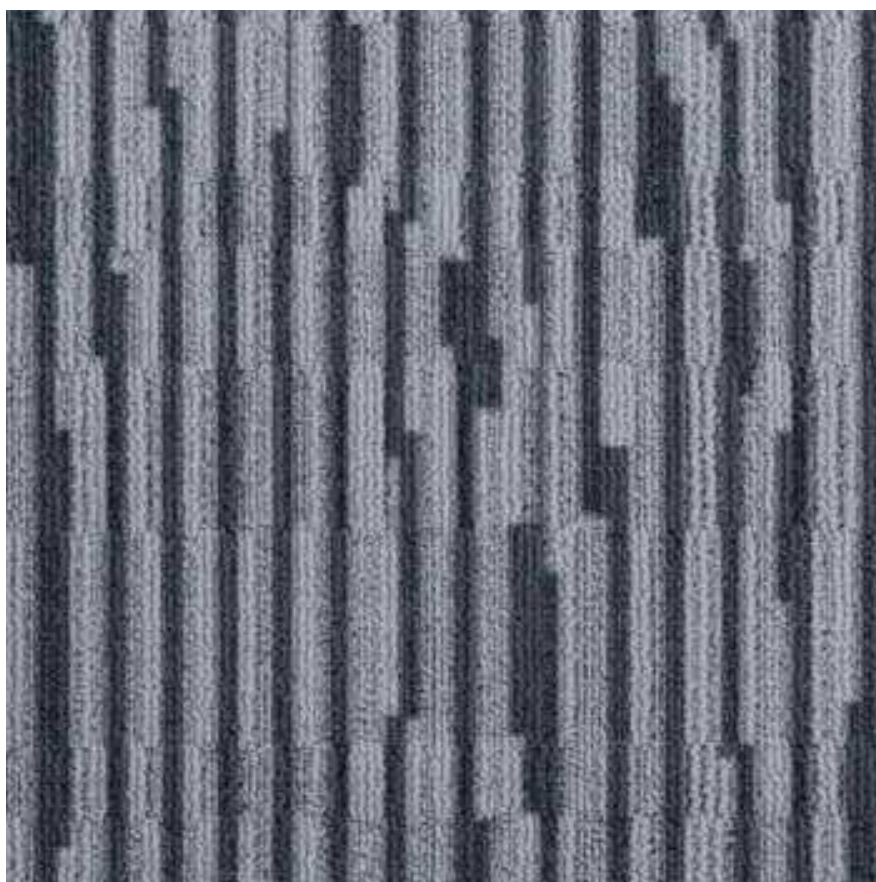

13758-A01

Det. appr. ca. 30 × 30 cm



13758-A07 Det. appr. ca. 30 × 30 cm



13758-A02 Det. appr. ca. 30 × 30 cm



13758-A03 Det. appr. ca. 30 × 30 cm



13758rug - A05


120 × 180 cm






13755rug - A01

120 × 180 cm

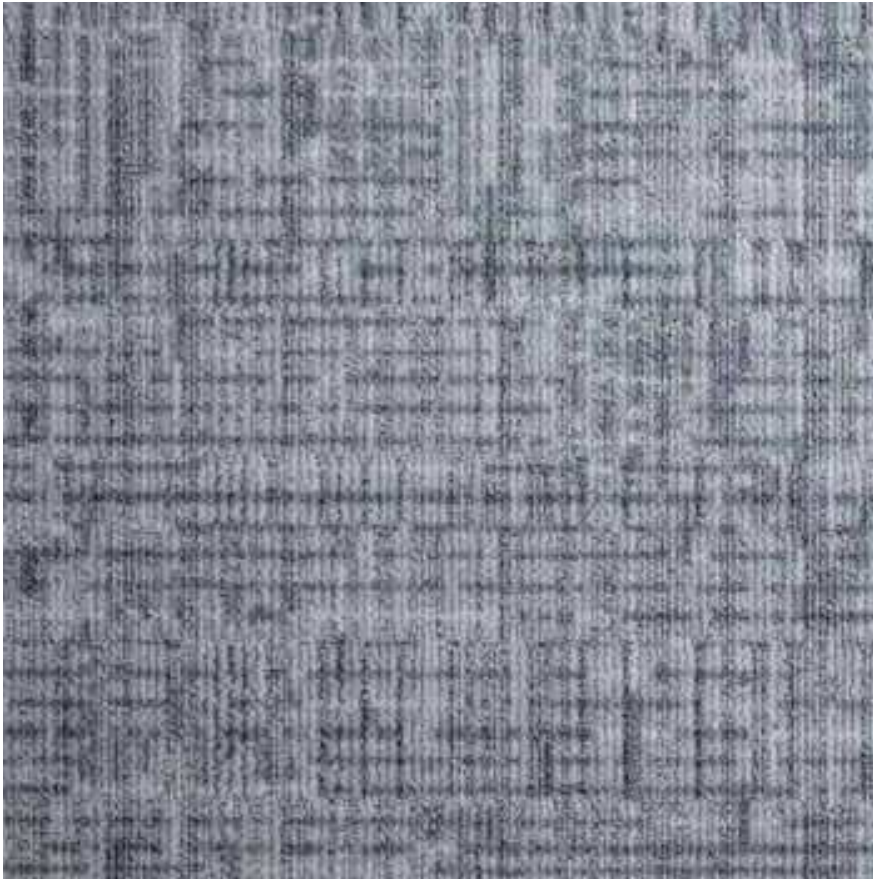

13755-A01

Det. appr. ca. 30 x 30 cm

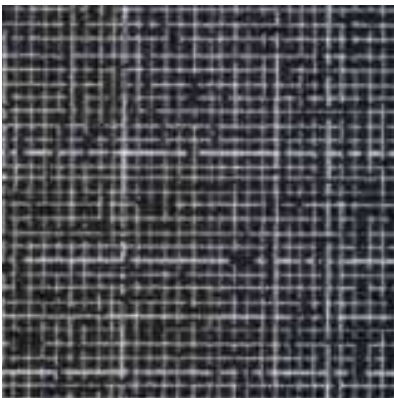

13755-A07 Det. appr. ca. 30 x 30 cm




13755-A05 Det. appr. ca. 30 x 30 cm



13755-A03 Det. appr. ca. 30 x 30 cm



13755-A06 Det. appr. ca. 30 x 30 cm

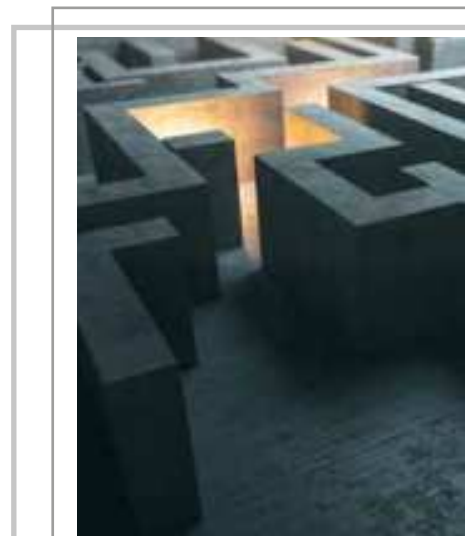



13752-A01


Det. appr. ca. 30 x 30 cm



13752-A07 Det. appr. ca. 30 x 30 cm



13752-A03 Det. appr. ca. 30 x 30 cm

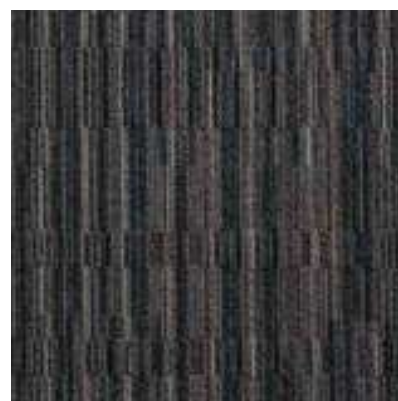

13752-A02 Det. appr. ca. 30 x 30 cm



13752-A05 Det. appr. ca. 30 x 30 cm



13752-A06 Det. appr. ca. 30 x 30 cm



13752-A04 Det. appr. ca. 30 x 30 cm



13752rug - A04

120 × 180 cm





13753rug - A02

120 × 180 cm



13753-A01

Det. appr. ca. 30 × 30 cm



13753-A05

Det. appr. ca. 30 × 30 cm



13753-A03

Det. appr. ca. 30 × 30 cm



13753-A02

Det. appr. ca. 30 × 30 cm



13753-A07

Det. appr. ca. 30 × 30 cm




13753-A04

Det. appr. ca. 30 × 30 cm



13753-A06

Det. appr. ca. 30 × 30 cm

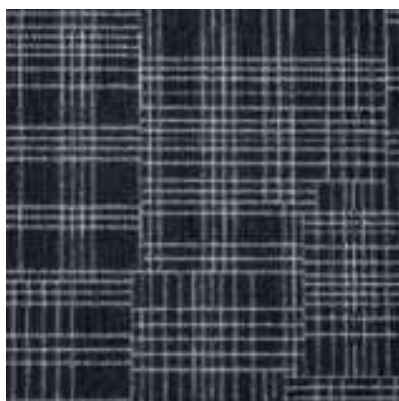


13754-A07 Det. appr. ca. 30 x 30 cm



13754-A05 Det. appr. ca. 30 x 30 cm



13754-A02 Det. appr. ca. 30 x 30 cm

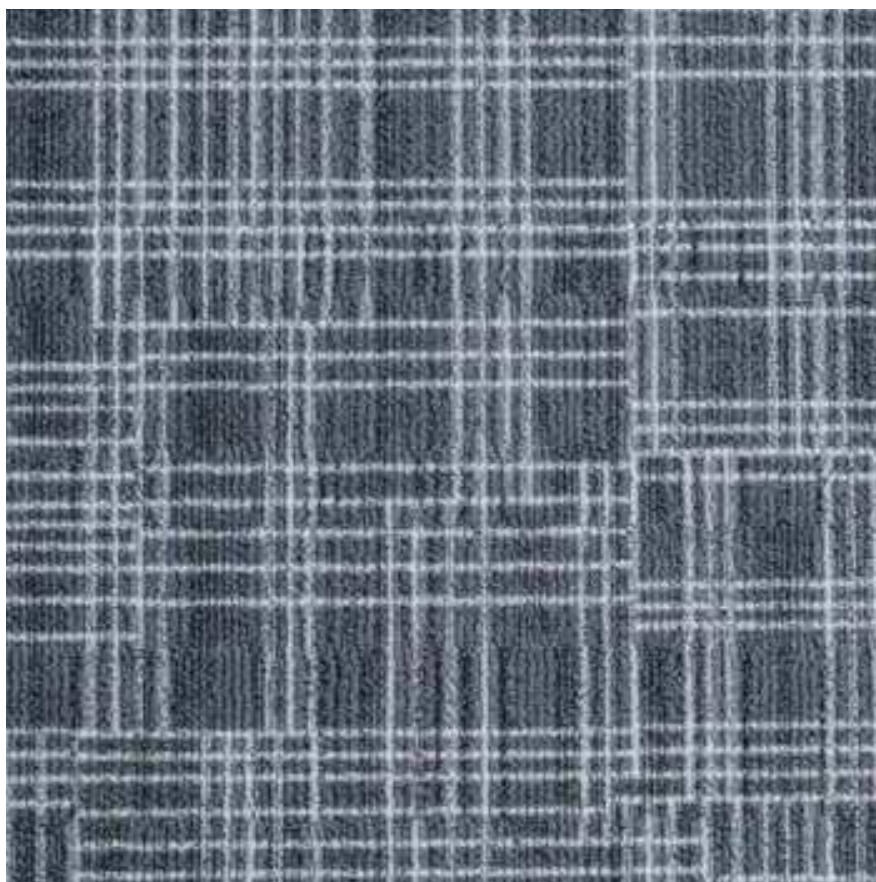

13754-A01

Det. appr. ca. 30 x 30 cm



13754-A06 Det. appr. ca. 30 x 30 cm



13754-A03 Det. appr. ca. 30 x 30 cm



13754rug - A07

120 × 180 cm






13751-A01




13751rug - A01


120 × 180 cm

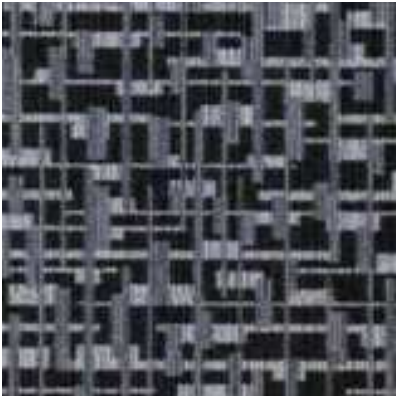

13751-A07 Det. appr. ca. 30 × 30 cm

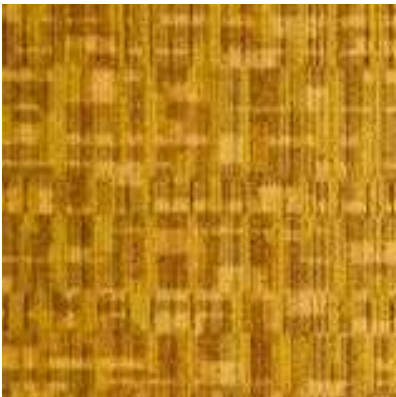

13751-A06 Det. appr. ca. 30 × 30 cm

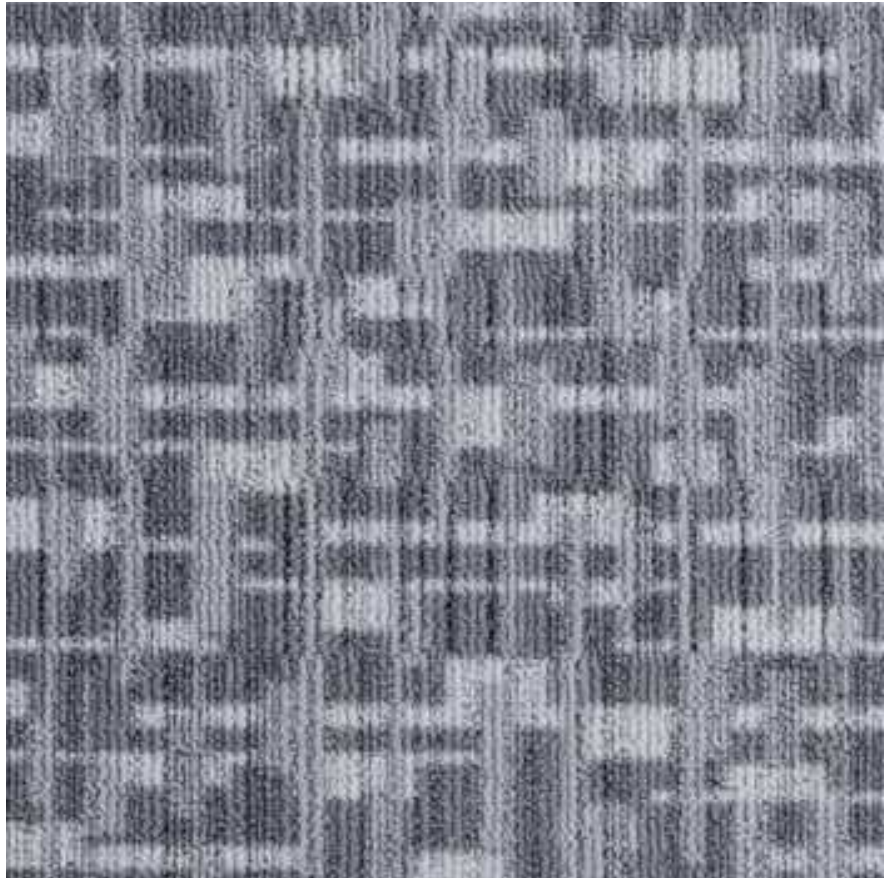

13751-A01


Det. appr. ca. 30 × 30 cm




13751-A03 Det. appr. ca. 30 × 30 cm



13751-A02 Det. appr. ca. 30 × 30 cm

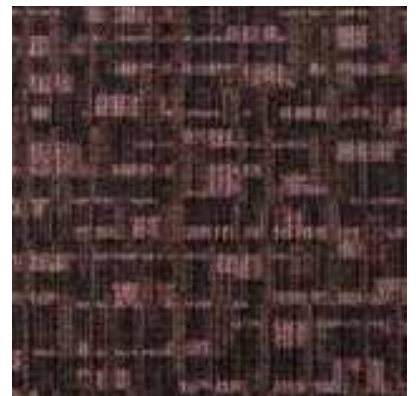

13751-A05 Det. appr. ca. 30 × 30 cm

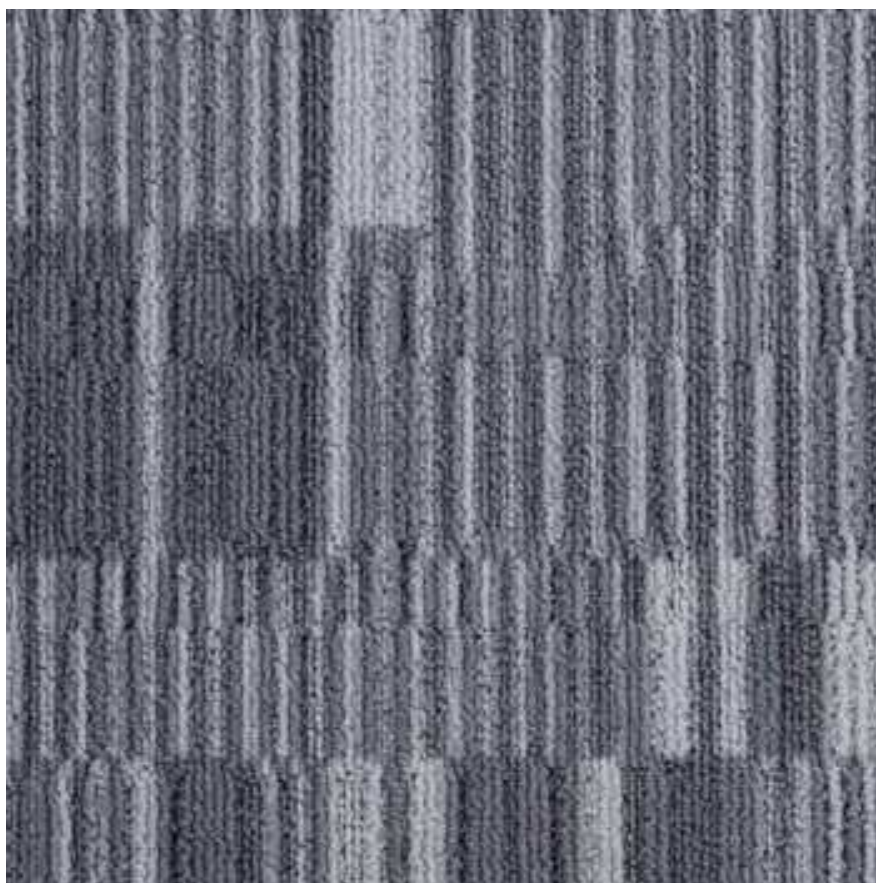

13756-A01

Det. appr. ca. 30 x 30 cm



13756-A07 Det. appr. ca. 30 x 30 cm



13756-A03 Det. appr. ca. 30 x 30 cm



13756-A02 Det. appr. ca. 30 x 30 cm



13756-A04 Det. appr. ca. 30 x 30 cm



13756-A06 Det. appr. ca. 30 x 30 cm




13756-A05 Det. appr. ca. 30 x 30 cm



13756rug - A06

120 × 180 cm



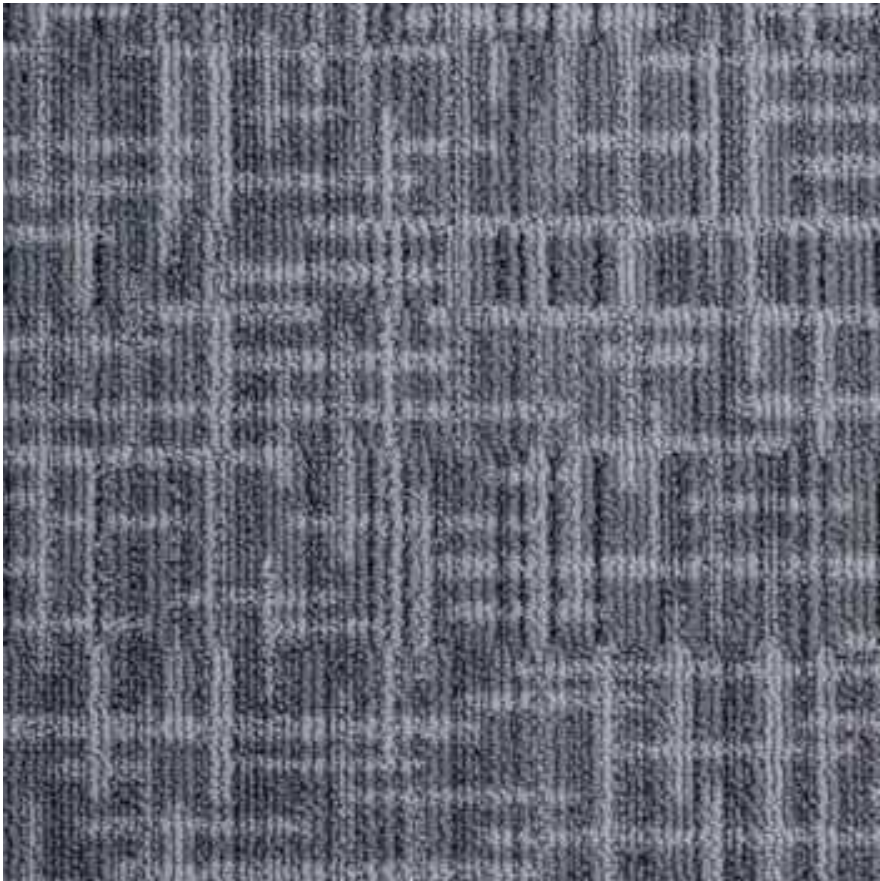

13750-A01

Det.appr. ca. 30 × 30 cm



13750-A07 Det.appr. ca. 30 × 30 cm



13750-A06 Det.appr. ca. 30 × 30 cm



13750-A04 Det.appr. ca. 30 × 30 cm



13750-A05 Det.appr. ca. 30 × 30 cm



13750-A03 Det.appr. ca. 30 × 30 cm



13750-A02 Det.appr. ca. 30 × 30 cm



13750rug - A03


120 × 180 cm





13757rug - A04

120 × 180 cm

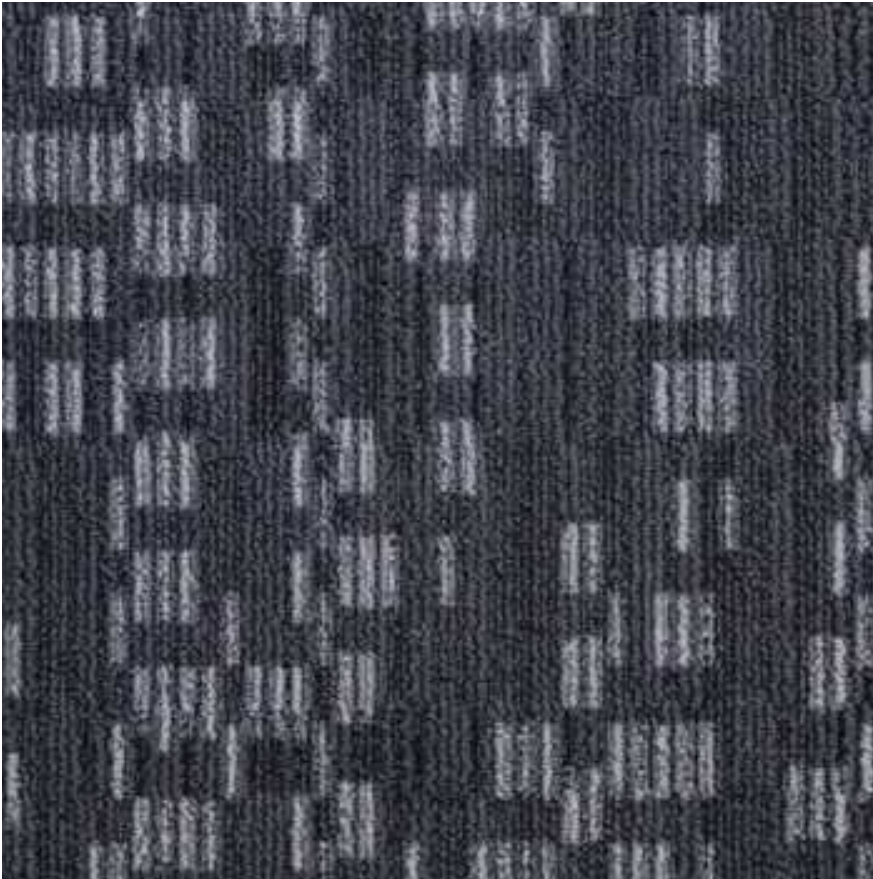

13757-A01

Det. appr. ca. 30 × 30 cm



13757-A06

Det. appr. ca. 30 × 30 cm



13757-A03

Det. appr. ca. 30 × 30 cm



13757-A04

Det. appr. ca. 30 × 30 cm



13757-A02

Det. appr. ca. 30 × 30 cm



13757-A07

Det. appr. ca. 30 × 30 cm



13757-A05

Det. appr. ca. 30 × 30 cm

Data sheet

AP ST 1150-28

DC HT 28

Status: 16.05.2024

delivery form	rolls	400 cm wide
construction	tufted loop heatset	1/8" gauge
pile material		100 % Polyamide 6
primary backing	non-woven	75 % PES / 25 % PA
secondary backing	woven	100 % PP, 64 g/m ²
pattern	digital paste printing	Chromojet
total weight	ISO 8543	ca. 2131 g/m ²
total thickness	ISO 1765	ca. 8 mm
pile thickness	ISO 1766	ca. 4,9 mm
total pile yarn weight		ca. 1183 g/m ²
pile density	ISO 8543	ca. 0,15 g/cm ³
number of tufts	ISO 1763	ca. 182700/m ²
CE-number		1658-CPR-3139
DoP-number		0001
Prodis-licence-number		5C7B320F
Environmental Product Declaration	ISO 14025+EN 15804+A2	EPD-HBM-20170149-CBC1-DE + annex LC 3



use class

32 - commercial; general
DIN EN 1307 | ISO 10361



luxury class

LC 3
DIN EN 1307 | DIN EN 8543



stair suitability

not suitable
DIN EN 1307 | DIN EN ISO 12951



castor chair suitability

intensive
DIN EN 1307 | DIN EN ISO 4918



colour fastness to light

≥ 5
DIN EN 1307 | DIN EN ISO 105-B02

colour fastness to water

≥ 4
DIN EN 1307 | DIN EN ISO 105-E01

colour fastness to rubbing

≥ 3-4
DIN EN 1307 | DIN EN ISO 105-X12



resistance of cut edges

DIN EN ISO 10833



slip resistance μ

≥ 0,30
DIN EN 14041 | DIN EN 13893



thermal resistance

ca. 0,13 m²K/W
DIN EN 12667



impact sound reduction ΔL_w

ca. 26 dB
DIN EN ISO 717-2 | DIN EN ISO 10140-3



sound absorption α_w

ca. 0,2
DIN EN ISO 354



electrical behaviour

body voltage ≤ 2 kV
ISO 6356



reaction to fire

CFI-s1
DIN EN 13501-1 | DIN EN ISO 9239-1,11925-1



We reserve the right to make technical changes that serve to improve quality. In rare cases, permanent shading may occur in velour carpets without impairing the usability. The cause of this is not due to the material or construction. Therefore, no warranty can be assumed for this. Halbmönd's carpets and rugs must be installed in accordance with the respective Halbmönd installation recommendations and the state of the art. All information is based on current knowledge and experience. They can only be general information without guarantee of properties, as we have no influence on the construction site conditions and processing. Due to the wide range of possible influences when using our products, they do not exempt the installer from carrying out his own tests and trials. Regular maintenance cleaning is decisive for the cleanliness, value retention and good appearance of the floor covering.



13758-A01



13759-A02rug

Data sheet

AP ST 1150-28

DC HT 28

Status: 02.07.2024

delivery form	rugs	400 cm wide
construction	tufted loop heatset	1/8" gauge
pile material		100 % Polyamide 6
primary backing	non-woven	75 % PES / 25 % PA
secondary backing	woven	100 % PP, 64 g/m ²
pattern	digital paste printing	Chromojet
total weight	ISO 8543	ca. 2131 g/m ²
total thickness	ISO 1765	ca. 8 mm
pile thickness	ISO 1766	ca. 4,9 mm
total pile yarn weight		ca. 1183 g/m ²
pile density	ISO 8543	ca. 0,15 g/cm ³
number of tufts	ISO 1763	ca. 182700/m ²



use class

22 - domestic: general
DIN EN 14215 | ISO 10361



luxury class

LC 2
DIN EN 14215 | DIN EN 8543



stair suitability

not suitable
DIN EN 14215 | DIN EN ISO 12951



castor chair suitability

occasional
DIN EN 14215 | DIN EN ISO 4918



colour fastness to light

≥ 5
DIN EN 14215 | DIN EN ISO 105-B02

colour fastness to water

≥ 4
DIN EN 14215 | DIN EN ISO 105-E01

colour fastness to rubbing

≥ 3-4
DIN EN 14215 | DIN EN ISO 105-X12



resistance of cut edges

DIN EN ISO 10833



slip resistance μ

≥ 0,30
DIN EN 13893



thermal resistance

ca. 0,13 m²K/W
DIN EN 12667



impact sound reduction ΔL_w

ca. 26 dB
DIN EN ISO 717-2 | DIN EN ISO 10140-3



sound absorption α_w

ca. 0,2
DIN EN ISO 354



electrical behaviour

body voltage ≤ 2 kV
ISO 6356



We reserve the right to make technical changes that serve to improve quality. In rare cases, permanent shading may occur in velour carpets without impairing the usability. The cause of this is not due to the material or construction. Therefore, no warranty can be assumed for this. Halbmönd's carpets and rugs must be installed in accordance with the respective Halbmönd installation recommendations and the state of the art. All information is based on current knowledge and experience. They can only be general information without guarantee of properties, as we have no influence on the construction site conditions and processing. Due to the wide range of possible influences when using our products, they do not exempt the installer from carrying out his own tests and trials. Regular maintenance cleaning is decisive for the cleanliness, value retention and good appearance of the floor covering.

CARPET PRODUCT GUIDE



Halbmond Teppichwerke GmbH
Brückenstraße 1
D-08606 Oelsnitz, Germany
Tel.: +49 37421-42-0
Fax: +49 37421-42-571
info@halbmond.de
www.halbmond.de



HTW DESIGN CARPET

Tel.: +49 5221-1779-0
info@htw-designcarpet.de
www.htw-designcarpet.de